



01/05/00

UTILITY PATENT APPLICATION TRANSMITTAL UNDER 37 C.F.R. §1.53(b)

ASSISTANT COMMISSIONER FOR PATENTS

Box PATENT APPLICATION

Washington D.C. 20231

Case Docket No.: P-068

Sir:

Transmitted herewith for filing is the patent application of
INVENTOR OR APPLICATION IDENTIFIER: Cheol Sheong LEE

FOR: RESERVED VIDEO RECORDING APPARATUS AND METHOD USING INTERNET DATA

Enclosed are:

1. [X] 16 pages of specification, claims, abstract
2. [X] 6 sheets of FORMAL drawing.
3. [X] 2 pages of newly executed Declaration & Power of Attorney (original).
4. [X] Priority Claimed.
5. [] Small Entity Statement.
6. [X] Information Disclosure Statement, Form PTO-1449 and reference.
10. [X] Authorization under 37 C.F.R. §1.136(a)(3).
11. [] Other:
7. [X] Assignment Papers for LG Electronics Inc. (cover sheet, assignment & assignment fee).
8. [X] Certified copy of Korean Patent Application No. 2434/1999, filed January 26, 1999 and 52033/1999, filed November 23, 1999.
9. [X] Two (2) return postcards.
[X] Stamp & Return with Courier.
[X] Prepaid Postcard-Stamped Filing Date & Returned with Unofficial Serial Number.

 jc685 U.S. PTO
 09/47/615
 01/05/00

CLAIMS AS FILED					
For	No. Filed		No. Extra	Rate	Fee
Total Claims	9	- 20	0	X \$18.00	\$0.00
Indep. Claims	7	- 3	4	X \$78.00	\$312.00
Multiple Dependent Claims (If applicable)				X \$260.00	\$0.00
				BASIC FEE	\$690.00
				TOTAL FILING FEE	\$1002.00

[] This is a Continuation-in-part (CIP) of prior application No: _____ filed _____. Incorporation By Reference-The entire disclosure of the prior application is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

[] Amend the specification by inserting before the first line the sentence:

--This application is a continuation-in-part of Application Serial No. _____ filed _____.--

[X] A check in the amount of \$1002.00 (Check # 8173) is attached.

[] Please charge my Deposit Account No. 16-0607 in the amount of \$____. A duplicate copy of this sheet is enclosed.

[X] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy is enclosed.

[X] Any additional filing fees required under 37 C.F.R. 1.16.

[X] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy of this sheet is enclosed.

[X] Any patent application processing fees under 37 C.F.R. 1.17.

[X] Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.

FLESHNER & KIM

 Daniel Y.J. Kim
 Registration No. 36,186

Correspondence Address Below:

P.O. Box 221200

Chantilly, VA 20153-1200

(703) 502-9440

DYL/mae

Date: January 5, 2000

RESERVED VIDEO RECORDING APPARATUS AND METHOD USING INTERNET DATA.

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

The present invention relates to a reserved video recording apparatus and method using internet data and, in particular, to a reserved video recording apparatus using internet data which makes it possible to connect to a homepage of each broadcasting station or web sites which provide broadcast program schedule data via the internet for thereby selecting a program desired to be video recorded, storing the schedule data of the selected program, and recording the corresponding program based on the stored data at the start of the program.

10

2. Description of the Prior Art

As shown in Figure 1, a conventional reserved video recording apparatus includes: a tuner 20 for selecting a desired broadcast signal among broadcast signals received from an antenna; a Y/C signal processing unit 30 in which video signals outputted from the tuner 20 process luminance signals and chrominance signals; a data slicer 40 in which the video signals outputted from the tuner 20 detects a certain horizontal line designated in a vertical retrace line interval of the video signals to thereafter output the same; a decoder 50 for detecting broadcast program data among data detected by the data slicer 40; a recorder 70 for recording the signals processed by the Y/C signal processing unit; a key input unit 80 for transmitting all sorts of orders inputted by an user; a control unit 90 for

15

20

25

unit 80 and the decoder 50; and a memory 60 for storing the detected broadcast schedule data in accordance with the control of the control unit 90.

A reserved video recording process according to the conventional reserved video recording apparatus constructed as described above will be described as

5 follows with reference to Figure 1.

First, a certain particular horizontal line in a vertical retrace line interval of video signals tuned and outputted by the tuner 20 is detected by the data slicer 40. In presently transmitted video signals, there is a vertical retrace line interval, as illustrated in Figure 2, as well as an audible and visible video signal interval .

10 Therefore, a certain particular line(the 16th line under the current KBPS standard) among horizontal lines positioned in the vertical retrace line interval is selected by the data slicer 40.

The broadcast schedule data contained in the horizontal line is detected by the decoder 50 for thereby being transmitted to the control unit 90. The control unit
15 90 reformats the data detected by the decoder 50 in a certain format(e.g., in a table format) and stores the reformatted data in the memory 40. Next, when an user selects a key for displaying the broadcast schedule data on the screen using the key input unit 80, the control unit 90 displays a broadcast schedule table of a certain format stored in the memory 60 on the screen.

20 Based on the thusly displayed broadcast schedule table, when the user selects a program that he or she intends to reservedly video record using the key input unit 80, the control unit 90 readouts the identification code of the corresponding program stored in the memory 60, and controls the tuner 20 for thereby tuning in to a reserved channel, so that demodulated video signals are
25 outputted. The thusly demodulated video signals are inputted to the Y/C signal

processing unit 30 and the data slicer 40, respectively. The data slicer 40 detects a certain particular horizontal line as described above, and the decoder 50 extracts the broadcast program data contained in the signal of the horizontal line to thereafter transmit the same to the control unit 90.

5 The control unit 90 compares the presently on-the-air program code(On-Air ID) with the program identification code readout from the memory 60. As a result of comparison, if the both codes are identical, the recorder 70 is controlled to thus record the video signals processed by the Y/C signal processing unit 30. If the both codes become different during the recording, the recorder 70 is controlled for
10 thereby finishing the recording. However, the conventional reserved video recording apparatus thusly operated has problems that there are not many products which adopt the KBPS standard, the above-described apparatuses are so expensive that the product price is increased, the reserved video recording process is very complicated, and a reserved video recording using the internet is
15 impossible.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a reserved
20 video recording apparatus using internet data by which a reserved video recording can be performed easily and at a lower cost.

To achieve the above objects, in a video recording/playback apparatus, there is provided a reserved video recording apparatus using internet data according to the present invention which includes: a communication unit for
25 connecting to a communication network to thereafter transmit and receive data; a

video memory unit for memorizing pixels of a video text; a conversion unit for
converting data received by the communication unit to signals for outputting the
data on the screen of an external video display device; a storage unit for storing an
selected broadcast program and its broadcast schedule data which correspond to
5 the output screen; and a control unit for executing a reserved video recording of
the corresponding program according to the stored data.

Additional advantages, objects and features of the invention will become
more apparent from the description which follows.

10 BRIEF DESCRIPTION OF THE INVENTION.

The present invention will become more fully understood from the detailed
description given hereinbelow and the accompanying drawings which are given by
way of illustration only, and thus are not limitative of the present invention, and
15 wherein:

Figure 1 is a block diagram of a reserved video recording apparatus
according to the conventional art;

Figure 2(a) is a view illustrating an odd field signal waveform during a
vertical retrace line interval of a composite video signal;

20 Figure 2(b) a view illustrating an even field signal waveform during a vertical
retrace line period of a composite video signal;

Figure 3 is an embodiment of a reserved video recording apparatus
according to the present invention.

Figure 4 is a first embodiment of a reserved video recording set-up method
25 according to the present invention.

Figure 5 is a second embodiment of a reserved video recording set-up method according to the present invention.

Figure 6 is an embodiment of a reserved video recording execution method according to the present invention.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS.

A reserved video recording apparatus using internet data according to the present invention will be described below with reference to Figure 3.

10

Figure 3 illustrates an embodiment of a reserved video recording apparatus using internet data according to the present invention which includes a modem 100 for connecting to an external communication network to thereby transmit and receive data, a video memory 110 which is connected with the modem 100 for thereby memorizing a video signal in a memory space corresponding to a pixel of a video text, a RAM DAC (Random Access Memory Digital/Analog Converter) 120 for continuously scanning the data stored in the video memory 110 and converting each data thusly scanned to RGB signals, a monitor 125 for outputting the signals outputted from the RAM DAC 120 on the monitor screen, an NTSC encoder 130 for converting the RGB signals outputted from the RAM DAC 120 to NTSC signals, a TV 135 for outputting the signals outputted from the NTSC encoder 130 on the TV screen, a key input unit 140 for selecting a broadcast program and all sorts of functions such as reserved video recording, a memory 150 for storing the broadcast schedule data of a broadcast program, a tuner 160 which is placed in a VCR and selects a RF signal transmitted from a broadcasting station, a Y/C signal processing unit 170 for separating a composite video signal outputted from the

15

20

25

tuner 160 into a luminance signal and a chrominance signal, a control unit 190 which is connected with the modem 100, video memory 110, RAM DAC 120, memory 150, key input unit 140, and timer 155 for thereby controlling all sorts of functions, and a recorder 180 for recording the video signal outputted from the Y/C
5 signal processing unit in accordance with the control of the control unit 190.

The operational sequence for the reserved video recording apparatus using internet data according to the present invention constructed as described above will be described below in detail.

When an user selects the reserved video recording mode using the key
10 input unit 140, the control unit 190 readouts the broadcast program data pre-stored in the memory 150, and outputs the same onto the screen of the TV 135 or the monitor 125. Then, the user selects a desired broadcast program using a certain key of the key input unit 140 based on the displayed data. Next, when a broadcast program selection order is inputted, the control unit 190 stores the
15 channel information of a selected broadcast program in the memory 150, while executing a web browser using the modem 100, connecting to a server(not shown) which provides an internet service, and then inputting a position information of the selected broadcasting station, for example, the IP address, into the web browser, thus trying to connect to the homepage of the corresponding broadcasting station.
20 The control unit 190 checks using the modem 100 whether a connection to the internet service provider server is made or not. If the connection is not made, the connection trial is repeated until it succeeds.

When a connection to the homepage of the broadcasting station is made, data provided by the site is transmitted to the modem 100 through a
25 communication network. The control unit 190 analyzes the digital data received

from the modem 100 to thereby find out the format of the data and a relative position in a page of the data. According to the results of the analysis, each received data is converted to a pixel data based on the output resolution and the number of colors presently set for the apparatus. Then, the control unit 190 writes the pixel data in the memory 110 by designating a memory address corresponding to a position which will be displayed on the screen.

Meanwhile, the RAM DAC 120 converts each pixel data in an address of the video memory 110 to the corresponding RGB signal, while continuously scanning the video memory 110. The converted signal is synchronized with a pixel clock which is a synchronous clock to display signals on the screen to thereafter be outputted to the NTSC encoder 130 and the monitor 125. The above-mentioned RGB signal is a signal which can be displayed in an image right after it is applied to an external display apparatus such as a monitor.

Based on the display information above described, the user continuously selects related links such as hypertext links for thereby arriving at sites which provides the schedule data of the desired broadcast program.

The RGB signals outputted from the RAM DAC 120 are inputted to the NTSC encoder 130 to thus be converted to NTSC signals. Horizontal synchronizing signals and vertical synchronizing signals which are synchronized with the pixel clock are inserted into the NTSC video signals, and applied to the TV 135 for thereby being displayed in an image. Also, in the case that the signals are applied to the monitor 125, the same result is obtained. Of course, it is possible to select between the monitor 125 and the TV 135.

Next, when the user selects a program that he or she intends to reservedly video record and its broadcast schedule data(date and time) based on the display

screen outputted to the monitor 125 or the TV 135, and chooses to reservedly
video record the program, the control unit 190 stores the information in the
memory 150 in which the channel information is pre-stored. At this time, the user
may selects a plurality of programs, in which case, broadcast schedule data is
5 stored by each program so that the programs can be distinguished from each
other.

When the user finishes the operation of recording reservation, the control
unit 190 traces the present time continuously using the timer 155, while reading
out the broadcast program and its schedule data stored in the memory 150. When
10 the control unit 190 confirms that both time data are identical, the recorder 180 is
controlled at that time for thereby recording inputted broadcast signals.

In the embodiment above described, the connection to an external internet
network is made using the modem, while it is also possible to make a connection
using an extra independent apparatus such as an internet set-top box, etc.

15 Figure 4 is a first embodiment of a reserved video recording set-up method
according to the present invention, and the detailed description thereof is as
follows.

First, the user selects a desired broadcasting station site among the internet
sites of broadcasting stations set for the set as a key svc such as the reserved
20 video recording mode/channel selection, or a certain site which guides broadcast
programs S1. At this time, it is assumed that a channel table corresponding to
each region is pre-stored. Then, an internet site connecting screen is displayed S2,
the connected screen is confirmed S3, and a program to be video recorded is
selected from a site displayed on the screen by an up/down key or enter key S4. If
25 the connected screen is not confirmed, the routine returns back to S2 to thereafter

read required data such as the broadcasting station, broadcast starting time, and broadcast finishing time from the user-selected program S5. Herein, only the finishing time data of each broadcast data is downloaded by presetting the station in a way of channel memory. Again, the read data(the broadcasting station, starting time, and finishing time) above mentioned is automatically stored in a reserved video recording memory location, and the state of the reserved video recording is displayed on the screen S6. Thereafter, it is determined whether there is a key input for checking if the reserved video recording is finished S7. If there is a key input, the routine returns to S4, and if there is not a key input, the reserved video recording program set-up is finished S8.

Figure 5 is a second embodiment of a reserved video recording set-up method according to the present invention, and the detailed description thereof is as follows.

First, a representative site address is read from the memory S1. At this time, the representative site stored in the memory is a connection site by region designated by the user in advance. Next, a connection to an internet site is made through the modem S2, and it is checked whether the connection is finished or not S3. If the connection is finished, program data of each channel is downloaded S4. If not finished, the routine returns to S2. At this time, firstly, selected channel's programs for 2~3 days since the present time which are set for the set are downloaded, and then programs for next 4~7 days are downloaded. Next, it is checked whether the downloading is finished S5. If the downloading is finished, the reserved video recording mode is displayed by a reserved video recording key input by the user S6. If not finished, the routine returns to S4. It is determined whether the corresponding channel number is inputted S7. If there is a key input,

program data of the corresponding channel is read from the memory, and displayed in a time sequential order S8. If not, the routine returns to S8. It is checked whether there is an user-selected program S9. If there is an user-selected program, the corresponding program is set as a reserved video recording information S10 to thereafter be finished. If not, the routine returns to S8.

Figure 6 is an embodiment of a reserved video recording execution method according to the present invention, and the detailed description thereof is as follows.

First, it is checked whether data is modified from the site which has the broadcast programs reserved for the memory of the set S1. Again, the program data reserved for the memory of the set is compared with the data inputted from the site of the broadcasting station S2. If both data are not coincident S3, the program data is updated S4. If both data are coincident, it is determined if it is time to start a reserved video recording S4. If it is time to start a reserved video recording, a reserved video recording program is executed S5. If not, the routine returns back to S2, and it is determined if it is time to finish the reserved video recording S6. If it is time to finish the reserved video recording, the reserved video recording is finished S7. If not, the routine returns to S5.

As described above, the reserved video recording apparatus using internet data according to the present invention provides effects that a reserved video recording can be implemented in an user-friendly environment with the increase of internet users by connecting to a homepage of a broadcasting station for selecting a broadcast program and its schedule data and performing a reserved video recording based on the data.

What is claimed is:

1. A video signal reserved video recording apparatus, comprising:
 - a communication means for connecting to a communication network to
 - 5 thereby transmit and receive data
 - a video signal storage means which is connected with the communication means for thereby memorizing a video signal;
 - a conversion means which is connected with the video signal storage means for thereby scanning the output of the video signal storage means and
 - 10 converting the same to a RGB signal;
 - a memory means for storing the broadcast reservation information about an user-selected program from the video signal storage means; and
 - a control means for controlling the above-described means.
- 15 2. The video signal reserved video recording apparatus of claim 1, wherein the broadcast reservation information is the date, time, and channel number of a certain program.

3. A video signal reserved video recording apparatus, comprising:
 - 20 a communication means for connecting to a communication network to thereby transmit and receive data
 - a video signal storage means which is connected with the communication means for thereby memorizing a video signal;
 - a conversion means which is connected with the video signal storage means for thereby scanning the output of the video signal storage means and
 - 25 means for thereby scanning the output of the video signal storage means and

converting the same to a RGB signal;

a memory means for storing the broadcast reservation information about an user-selected program from the video signal storage means;

a control means for controlling the above-described means; and

5 a broadcast signal conversion means for converting the output of the conversion means to a certain particular broadcast signal.

4. The video signal reserved video recording apparatus of claim 3, wherein the broadcast signal conversion means is a NTSC encoder.

10 5. A video signal reserved video recording apparatus, comprising:

a communication means for connecting to a communication network to thereby transmit and receive data

a video signal storage means which is connected with the communication
15 means for thereby memorizing a video signal;

a memory conversion means which is connected with the video signal storage means for thereby scanning the output of the video signal storage means and converting the same to a RGB signal;

a control means for controlling the above-described means;

20 a broadcast signal conversion means for converting the output of the conversion means to a certain particular broadcast signal; and

a TV unit for displaying the output of the broadcast signal conversion means on the TV screen.

25 6. A video signal reserved video recording apparatus, comprising:

a communication means for connecting to a communication network to thereby transmit and receive data

a video signal storage means which is connected with the communication means for thereby memorizing a video signal;

5 a conversion means which is connected with the video signal storage means for thereby scanning the output of the video signal storage means and converting the same to a RGB signal;

a control means for controlling the above-described means; and

10 a recorder for recording the video signal in accordance with the control of the control means.

7. A video signal reserved video recording set-up method, comprising:

a first step of reading an address of a representative site from a memory;

15 a second step of connecting to an internet site through a modem, checking if the connection is finished, and downloading a program data of each channel;

a third step of checking if the downloading is finished and displaying the reserved video recording mode by a reserved video recording key input by an user.

20 a fourth step of determining whether there is a key input of the corresponding channel number, reading the program data of the corresponding channel from the memory, and displaying the same in a time sequential order; and

a fifth step of determining whether there is an user-selected program and setting the corresponding program as a reserved video recording information.

25 8. A video signal reserved video recording set-up method,

comprising:

a first step of selecting a desired broadcasting station site among the internet sites of broadcasting stations set for the set;

a second step of displaying an internet site connecting screen and

5 confirming the connected screen;

a third step of selecting a program to be reservedly video recorded from the site displayed on the screen;

a fourth step of reading required data such as the broadcasting station, broadcast starting time, and broadcast finishing time from the user-selected
10 program;

a fifth step of automatically storing the data read in the fourth step in a reserved video recording memory location and displaying the state of the reserved video recording on the screen;

a sixth step of determining whether there is a key input for checking if a
15 reserved video recording is finished and finishing the reserved video recording set-up.

9. A reserved video recording execution method, comprising:

a first step of cheking whether data is modified from the site which has the
20 broadcast programs reserved for the memory of the set;

a second step of comparing the program data reserved for the memory of the set with the data inputted from the site of the broadcasting station;

a third step of updating the program data if both data are not coincident in the second step;

25 a fourth step of determining if it is time to start a reserved video recording

and executing a reserved video recording program if both data are coincident in the second step; and

a fifth step of determining if it is time to finish the reserved video recording and finishing the reserved video recording if it is time to finish the reserved video

5 recording.

10

ABSTRACT OF THE DISCLOSURE

The present invention relates to a reserved video recording apparatus using internet data which includes a modem for connecting to an external communication network to thereby transmit and receive data, a video memory which has a memory space corresponding to a pixel of a video text, a RAM DAC for continuously scanning the data stored in the video memory and converting each data thusly scanned to RGB signals, an NTSC encoder for converting the RGB signals outputted from the RAM DAC to NTSC signals for broadcasting, a monitor and a TV for outputting the signals outputted from the RAM DAC and the broadcast signals outputted from the NTSC encoder on the screen, respectively, a memory for temporally storing the broadcast schedule data of the selected program, a micro computer for controlling the operation of a recorder to which an external video signal passed through a tuner and a Y/C unit is finally inputted based on the broadcast schedule data temporally stored and a timer. Thus, a reserved video recording can be implemented in an user-friendly environment with the increase of internet users by connecting to a homepage of a broadcasting station for selecting a broadcast program and its schedule data and performing a reserved video recording based on the data.

FIG. 1
CONVENTIONAL ART

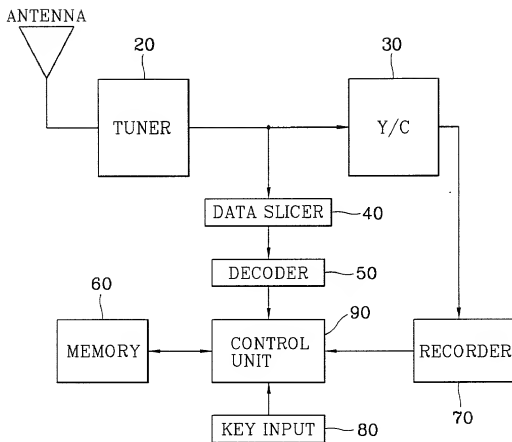


FIG. 2A

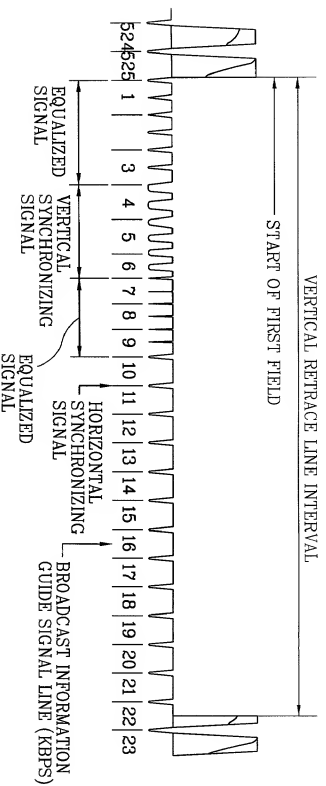


FIG. 2B

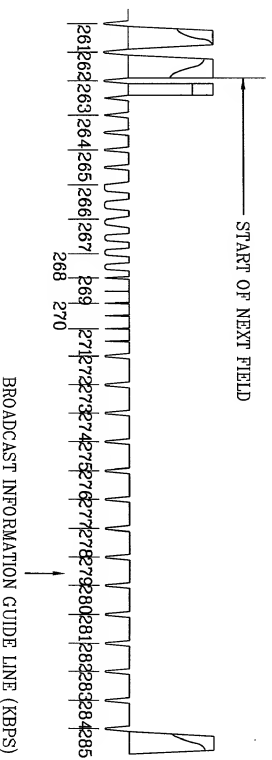


FIG. 3

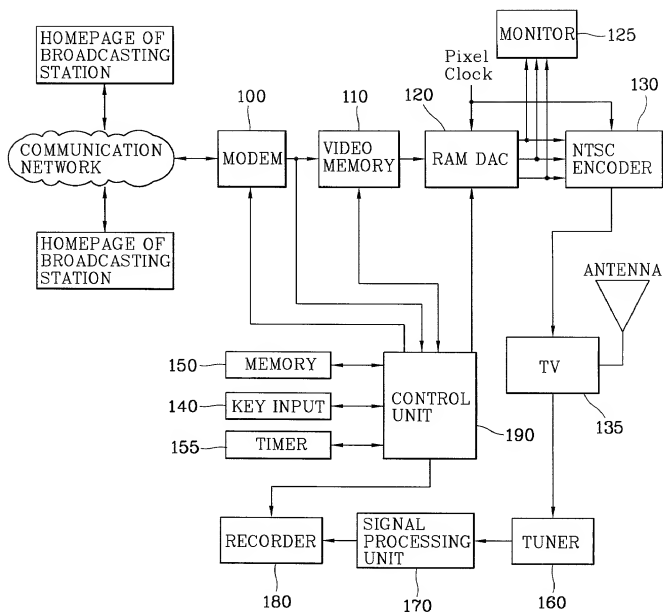


FIG. 4

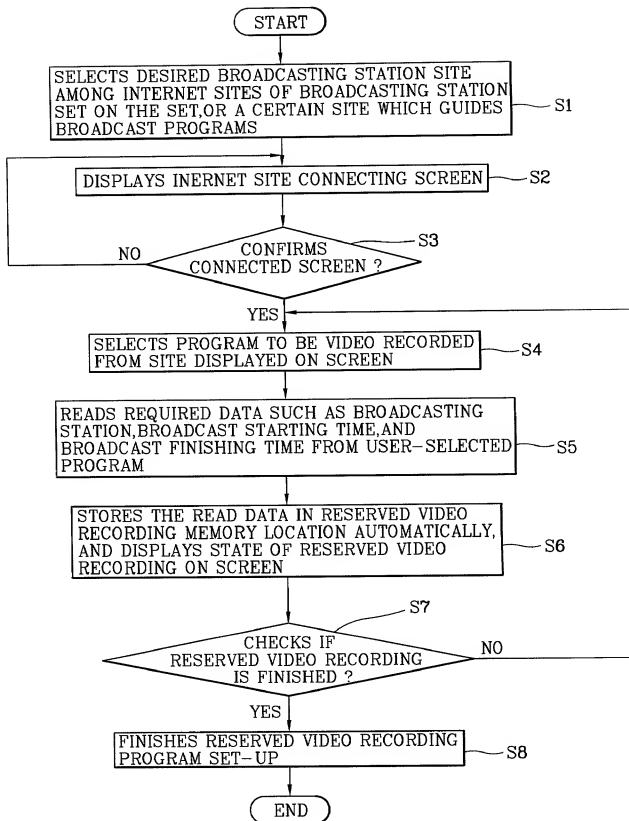


FIG. 5


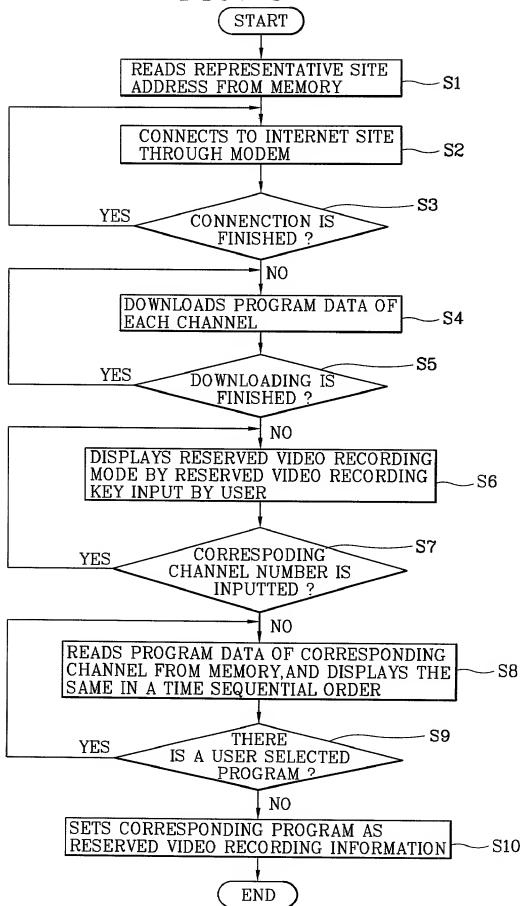


FIG. 6

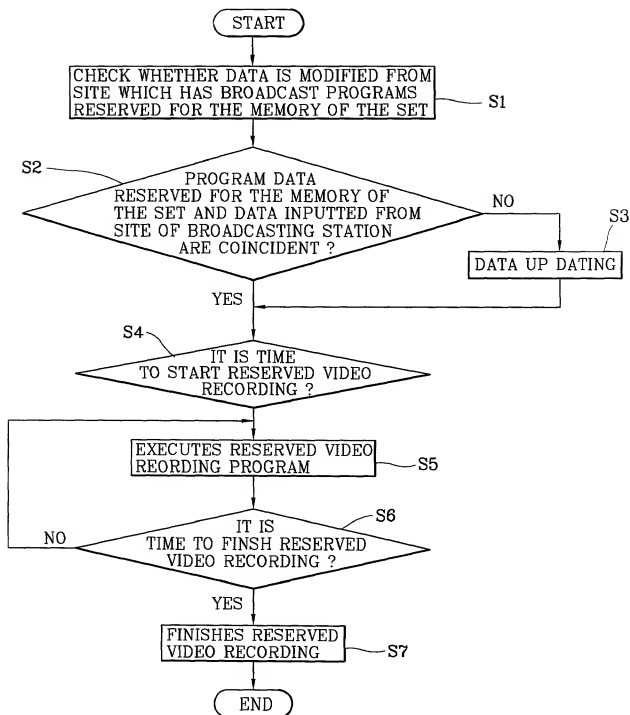

Docket No.: _____

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled _____

RESERVED VIDEO RECORDING APPARATUS AND METHOD USING INTERNET DATA

_____, the
specification of which

[☒] is attached hereto [☐] was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365 (b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s):

Number	Country	Foreign Filing Date Month/Day/Year
2434/1999	Korea	01/26/1999
52033/1999	Korea	11/23/1999

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s):	Filing Date (Month/Day/Year)
-------------------------------	-------------------------------------

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

**Prior U. S. Application
or PCT Parent Number**

Filing Date (Month/Day/Year)

Parent Patent Number

(if applicable)


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Daniel Y.J. Kim, Registration No. 36,186 and Mark L. Fleshner, Registration No. 34,596; Carl R. Wesolowski, Registration No. 40,372, John C. Eisenhart, Registration No. 38,128, Rene A. Vazquez, Registration No. 38,647; Michael J. Cornelson, Registration No. 40,395; and Stuart I. Smith, Registration No. 42,159; and Carol L. Druzbeck, Registration No. 40,287, all of

FLESHNER & KIM
P. O. Box 221200
Chantilly, Virginia 20153-1200

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor(s): Cheol Sheong LEE

Inventor's signature: 

Date: DEC. 13, 1999

Residence: Suwon, Korea

Citizenship: Republic of Korea

Post Office Address: Hwasu Apt. 22-201, Hwasu-Dong, Jangan-Ku, Suwon, Kyungki-Do, Korea

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address: